

CABLE LOCATOR / TESTER KIT

5001 TK is a cable locator / tester kit which provides the testing needs for cable locating and network cable testing.

Kit includes:

- **5500 CB** cable locator
- **185 LCT** LAN cable tester
- High quality carry case.



5500 CB CABLE LOCATOR



Transmitter

- The 5500 CB transmitter is a great tool for locating and identifying cables and individual conductors.
- Designed for locating unenergized cables and powered cables.
- Voltage measurement for cables :
ACV 12V~300V
DCV 12V~300V
- Signal Transmission
 - Transmission Power Level Selection (includes 1, 2, 3)
 - Transmission Signal Code Selection (includes F, E, H, d, L, C, O, A)
- Flashlight & Back Light function.
- The Silent Mode (Disable Button Beep).
- The Level Bar Display on the LCD Screen (the transmission power level indication).
- The Action Wave Display on the LCD Screen (when the signal is transmitted).
- Auto power off function.


Receiver

- The 5500 CB receiver is designed to identify and trace wires or cables.
- Designed for locating unenergized cables and powered cables.
- Signal Detection (includes Level, Code, Value)
 - Automatic Mode
 - Manual Mode (There are 9 levels to select)
- UAC Mode (AC Power Line Detection).
- Flashlight & Back Light function.
- The Silent Mode (Disable Button Beep & Frequency Tone).
- The Danger Symbol is to indicate the AC voltage on the Line.
- The Level Bar Display on the LCD Screen for the signal value & the UAC power value.
- Auto power off function.

5500 CB CABLE LOCATOR


INSTRUMENT LAYOUT

Transmitter

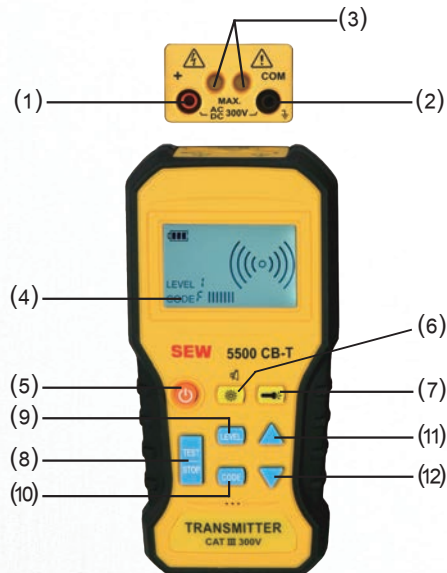

- (1) "+" Terminal
- (2) "COM" Terminal
- (3) Flashlight
- (4) LCD
- (5) ON/OFF Button
- (6) Backlight and Mute Button
- (7) Flashlight Button
- (8) TEST/STOP Button
- (9) LEVEL Button
- (10) CODE Button
- (11) ▲ Button
- (12) ▼ Button

Receiver

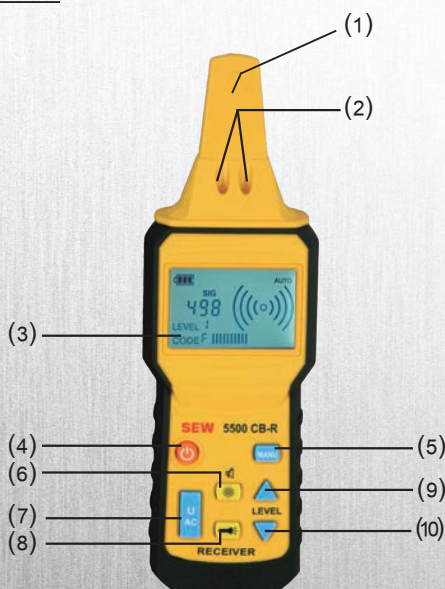

- (1) Sensor of the Receiver
- (2) Flashlight
- (3) LCD
- (4) ON/OFF Button
- (5) MANU Button
- (6) Backlight and Mute Button
- (7) UAC Button
- (8) Flashlight Button
- (9) ▲ Button
- (10) ▼ Button


SPECIFICATIONS


Transmitter

Output signal frequency	125kHz
Voltage measurement range	12~300V AC / DC
Accuracy	±(2%rdg+2dgt)
Display	LCD shows function and bargraph
Power source	1.5V (AAA) battery × 6
Fuse	690V/0.5A (6.3 × 32mm)
Operating temperature & humidity	0°C~40°C 80% R.H. Max.
Storage temperature & humidity	-10°C~50°C 80% R.H. Max.
Dimensions	188(L)×90(W)×47(D)mm
Weight (battery included)	Approx. 389g

Receiver

Detection depth	< 50cm
Display	LCD shows function and bargraph
Power source	1.5V (AAA) battery × 6
Operating temperature & humidity	0°C~40°C 80% R.H. Max.
Storage temperature & humidity	-10°C~50°C 80% R.H. Max.
Dimensions	247(L)×78(W)×45(D)mm
Weight (battery included)	Approx. 324g

- Safety Standard :
EN 61010-1 CAT III 300V
EN 61326-1
- Low battery indication:
"  " symbol appears and flashes on the LCD
- Accessories :
Instruction manual
Test leads (TEL-AL11-7A, TEL-5500 EU, TEL-5500 LAH)
Alligator clip (AL-25C)
Spike
Batteries

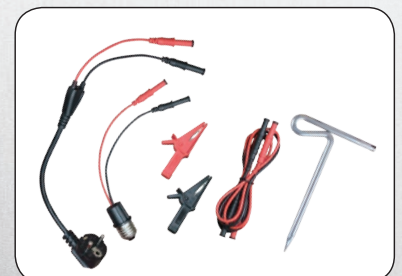

185 LCT LAN CABLE TESTER

SEW



INTRODUCTION

- The 185 LCT LAN cable tester is a newly designed tool that can easily test the correct pin configuration of RJ45/RJ11 modular cables, 10/100 base-T cables, Token Ring cables etc.
- By comparing one transmitting end and the corresponding receiving end, the 185 LCT LAN cable tester also can test installed cables far away by using the remote receiving unit.
- The 185 LCT provides for a variety of wiring checks, such as cable continuity, open status, short status and miss-wired.

FEATURES

- Designed for RJ45/RJ11 modular cables, 10/100 base-T cables and Token Ring cables
- Verifies cable continuity, open status, short circuit and miss-wired
- Remote receiving unit is available for installed cables far away either on wall plates or on patch panels
- Auto and manual scan functions
- Ground wire test
- Lock status function
- Both buzzer audio warning and LED visual indication for wire status

SPECIFICATIONS

Display	LED
Operating temperature	0°C ~ 40°C
Dimensions	Master unit 132(L) × 55(W) × 39(D)mm Remote receiving unit 74(L) × 30(W) × 25(D)mm
Weight (battery included)	Master unit : 148 g Remote receiving unit : 33g
Power source	9V × 1
Safety standard	EN 61326-1
Accessories	Instruction manual BNC testing cables Self-test cable Carry case Battery Multi-wire testing cables (optional)

Accessories



BNC testing cables



Self-test cable



Multi-wire testing cables (optional)

STANDARD ELECTRIC WORKS CO., LTD.
www.sew.com.tw

5F., NO.105, JHONGCHENG RD., TUCHENG DIST.,
NEW TAIPEI CITY 23674, TAIWAN (R.O.C.)
TEL: 886-2-22681528
FAX: 886-2-22681529
e-mail: sales@sew.com.tw

Model
5001 TK